



User Manual

GeoMax Zenith06 Pro Smart Antenna

English

Version 1.1

Introduction

Purchase

Congratulations on the purchase of the GeoMax Zenith06 Pro Smart Antenna.



This manual contains important safety directions as well as instructions for setting up the product and operating it. Refer to [1 Safety Directions](#) for further information.

Read carefully through the User Manual before you switch on the product.



The content of this document is subject to change without prior notice. Ensure that the product is used in accordance with the latest version of this document.

Updated versions are available for download at the following Internet address:

<https://geomax-positioning.com/partner-area>

Product identification

The model and serial number of your product are indicated on the type label.

Always refer to this information when contacting your agency or GeoMax authorised service centre.

Trademarks

- *Bluetooth®* is a registered trademark of Bluetooth SIG, Inc.

All other trademarks are the property of their respective owners.

Validity of this manual

This manual applies to the GeoMax Zenith06 Pro smart antenna.

Available documentation

Name	Description/Format		
Zenith06 Pro Quick Guide	Provides an overview of the product together with technical data and safety directions. Intended as a quick reference guide.	✓	✓
Zenith06 Pro User Manual	All instructions required in order to operate the product to a basic level are contained in the User Manual. Provides an overview of the product together with technical data and safety directions.	-	✓

GeoMax Technical Library

Refer to the Technical Library web page for all GeoMax Zenith06 Pro smart antenna documentation and software:

- <https://portal.hexagon.com/>

GeoMax Technical Library offers a wide range of services and information. With direct access to GeoMax Technical Library, you are able to access all relevant services whenever it is convenient for you.



The availability of services depends on the instrument model.

Table of Contents

1	Safety Directions	4
1.1	General Introduction	4
1.2	Definition of Use	4
1.3	Limits of Use	5
1.4	Responsibilities	5
1.5	Hazards of Use	6
2	Description of the System	10
2.1	General Information	10
2.2	Instrument Components	10
2.3	Accessories	11
3	Operation	12
3.1	Power On/Off, Charging, Reset	12
3.2	Setup for the Zenith06 Pro Smart Antenna	13
3.3	Phase Centre of the Zenith06 Pro Smart Antenna	14
3.4	Settings of the Zenith06 Pro Smart Antenna	14
4	Care and Transport	15
4.1	Transport	15
4.2	Storage	15
4.3	Cleaning and Drying	16
5	Technical Data	17
5.1	Technical Data	17
5.2	Conformity to National Regulations	19
5.3	Dangerous Goods Regulations	21
6	GeoMax Zenith06 Pro smart antenna Bundle	22
6.1	Standard Configuration	22
6.2	Accessories	22
7	Software Licence Agreement/Warranty	23

1

Safety Directions

1.1

General Introduction

Description

The following directions enable the person responsible for the product, and the person who actually uses the equipment, to anticipate and avoid operational hazards.

The person responsible for the product must ensure that all users understand these directions and adhere to them.

About warning messages

Warning messages are an essential part of the safety concept of the instrument. They appear wherever hazards or hazardous situations can occur.

Warning messages...

- make the user alert about direct and indirect hazards concerning the use of the product.
- contain general rules of behaviour.

For the users' safety, all safety instructions and safety messages shall be strictly observed and followed! Therefore, the manual must always be available to all persons performing any tasks described here.

DANGER, WARNING, CAUTION and **NOTICE** are standardised signal words for identifying levels of hazards and risks related to personal injury and property damage. For your safety, it is important to read and fully understand the following table with the different signal words and their definitions! Supplementary safety information symbols may be placed within a warning message as well as supplementary text.

Type	Description
 DANGER	Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.
 WARNING	Indicates a potentially hazardous situation or an unintended use which, if not avoided, could result in death or serious injury.
 CAUTION	Indicates a potentially hazardous situation or an unintended use which, if not avoided, may result in minor or moderate injury.
NOTICE	Indicates a potentially hazardous situation or an unintended use which, if not avoided, may result in appreciable material, financial and environmental damage.
	Important paragraphs which must be adhered to in practice as they enable the product to be used in a technically correct and efficient manner.

1.2

Definition of Use

Intended use

- Carrying out measurement tasks using various GNSS measuring techniques
- Computing with software
- Data communication with external appliances
- Data transfer with Bluetooth®
- Measuring coordinates
- Measuring pole tilt and computing coordinates
- Measuring raw data and computing coordinates using carrier phase and code signal from GNSS satellites (GNSS systems)
- Recording GNSS and point related data
- Recording measurements

Reasonably foreseeable misuse

- Controlling of machines, moving objects or similar monitoring applications without additional control and safety installations
- Disabling of safety systems
- Inadequate safeguards at the working site
- Modification or conversion of the product
- Opening the product using tools, for example a screwdriver, unless this is permitted for certain functions
- Removal of hazard notices
- Use after misappropriation
- Use of any other firmware than the official GeoMax Zenith06 Pro Smart Antenna firmware
- Use of the product without instructions
- Use of products with recognisable damage or defects
- Use outside of the intended use and limits
- Use with accessories from other manufacturers without the prior explicit approval of GeoMax

1.3

Limits of Use

Environment

Suitable for use in an atmosphere appropriate for permanent human habitation. Not suitable for use in aggressive or explosive environments.



WARNING

Working in hazardous areas or close to electrical installations or similar situations

Life Risk.

Precautions:

- ▶ Local safety authorities and safety experts must be contacted by the person responsible for the product before working in such conditions.



The following advice is only valid for battery charger, power adapter and car adapter.

Environment

Suitable for use in dry environments only and not under adverse conditions.



1.4

Responsibilities

Manufacturer of the product

GeoMax AG, CH-9443 Widnau, hereinafter referred to as GeoMax, is responsible for supplying the product, including the user manual and original accessories, in a safe condition.

Person responsible for the product

The person responsible for the product has the following duties:

- To understand the safety instructions on the product and the instructions in the User Manual
- To ensure that the product is used in accordance with the instructions
- To be familiar with local regulations relating to safety and accident prevention
- To stop operating the system and inform GeoMax immediately if the product and the application become unsafe
- To ensure that the national laws, regulations and conditions for the operation of the product are respected

⚠ DANGER**Risk of electrocution**

Because of the risk of electrocution, it is dangerous to use poles, levelling staffs and extensions in the vicinity of electrical installations such as power cables or electrical railways.


Precautions:

- ▶ Keep at a safe distance from electrical installations. If it is essential to work in this environment, first contact the safety authorities responsible for the electrical installations and follow their instructions.

**⚠ WARNING****Improper disposal of product**

If the product is improperly disposed of, the following can happen:

- If polymer parts are burnt, poisonous gases are produced which may impair health.
- If batteries are damaged or are heated strongly, they can explode and cause poisoning, burning, corrosion or environmental contamination.
- By disposing of the product irresponsibly you may enable unauthorised persons to use it in contravention of the regulations, exposing themselves and third parties to the risk of severe injury and rendering the environment liable to contamination.

Precautions:

The product must not be disposed with household waste.
Dispose of the product appropriately in accordance with the national regulations in force in your country.
Always prevent access to the product by unauthorised personnel.

⚠ WARNING**Distraction or loss of attention**

During dynamic applications there is a danger of accidents occurring if the user does not pay attention to the environmental conditions around, for example obstacles, excavations or traffic.

Precautions:

- ▶ The person responsible for the product must make all users fully aware of the existing dangers.

⚠ WARNING**Lightning strike**

If the product is used with accessories, for example masts, staffs, poles, you may increase the risk of being struck by lightning.

Precautions:

- ▶ Do not use the product in a thunderstorm.

⚠ WARNING**Inadequate securing of the working site**

This can lead to dangerous situations, for example in traffic, on building sites and at industrial installations.

Precautions:

- ▶ Always ensure that the working site is adequately secured.
- ▶ Adhere to the regulations governing safety, accident prevention and road traffic.

 WARNING

Improperly repaired equipment

Risk of injuries to users and equipment destruction due to lack of repair knowledge.

Precautions:

- ▶ Only authorised GeoMax Service Centres are entitled to repair these products.

For the AC/DC power supply:

 WARNING

Electric shock due to missing ground connection

If unit is not connected to ground, death or serious injury can occur.

Precautions:

- ▶ The power cable and power outlet must be grounded!



For the AC/DC power supply and the battery charger:

 WARNING

Electric shock due to use under wet and severe conditions

If unit becomes wet, it may cause you to receive an electric shock.

Precautions:

- ▶ If the product becomes humid, it must not be used!
- ▶ Use the product only in dry environments, for example in buildings or vehicles.



- ▶ Protect the product against humidity.

For the AC/DC power supply and the battery charger:

 WARNING

Unauthorised opening of the product

Either of the following actions may cause you to receive an electric shock:

- Touching live components
- Using the product after incorrect attempts were made to carry out repairs.

Precautions:

- ▶ Do not open the product!
- ▶ Only authorised GeoMax Service Centres are entitled to repair these products.

 WARNING

Use of product with radio or digital cellular phone devices

Electromagnetic fields can cause disturbances in other equipment, installations, medical devices, for example pacemakers or hearing aids, and aircrafts. Electromagnetic fields can also affect humans and animals.

Precautions:

- ▶ Although the product meets the strict regulations and standards which are in force in this respect, GeoMax AG cannot completely exclude the possibility that other equipment can be disturbed or that humans or animals can be affected.
- ▶ Do not operate the product with radio or digital cellular phone devices in the vicinity of filling stations or chemical installations, or in other areas where an explosion hazard exists.
- ▶ Do not operate the product with radio or digital cellular phone devices near medical equipment.
- ▶ Do not operate the product with radio or digital cellular phone devices in aircrafts.
- ▶ Do not operate the product with radio or digital cellular phone devices for long periods with the product immediately next to your body.



This warning also applies when using products with Bluetooth.

 CAUTION

Intense electromagnetic radiation. For example, near radio transmitters, transponders, two-way radios or diesel generators

Although the product meets the strict regulations and standards which are in force in this respect, GeoMax cannot completely exclude the possibility that the function of the product may be disturbed in such an electromagnetic environment.

Precautions:

- ▶ Check the plausibility of results obtained under these conditions.

 CAUTION

Electromagnetic radiation due to improper connection of cables

If the product is operated with connecting cables, attached at only one of their two ends, the permitted level of electromagnetic radiation may be exceeded and the correct functioning of other products may be impaired. For example, external supply cables or interface cables.

Precautions:

- ▶ While the product is in use, connecting cables, for example product to external battery or product to computer, must be connected at both ends.

 CAUTION

Unapproved chargers or cables

Connecting the charger improperly may cause serious damage to the device. Any damage caused by misuse is not covered by the warranty. Unapproved chargers or cables can cause the battery to explode or damage the device.

Precautions:

- ▶ Use only GeoMax-approved chargers, batteries, and cables.

 CAUTION

Keeping the device too close to the human body during operation

Health risk

Precautions:

- ▶ Use the device at least 10 mm apart from the human body.
- ▶ This device has been tested for typical operations near the human body, for example handheld mode, with the device kept at 10 mm from the user's body.

CAUTION

Not properly secured accessories

If the accessories used with the product are not properly secured and the product is subjected to mechanical shock, for example blows or falling, the product may be damaged or people can sustain injury.

Precautions:

- ▶ When setting up the product, make sure that the accessories are correctly adapted, fitted, secured, and locked in position.
- ▶ Avoid subjecting the product to mechanical stress.

CAUTION

Dropping the product

When being dropped, the product can cause personal injury and/or mechanical damage.

Precautions:

- ▶ Ensure to have a firm grip on the product before operating it.

CAUTION

Damage to instrument

Cleaning the instrument while the device is switched on can damage the instrument or the battery.

Precautions:

- ▶ Before cleaning, switch off the instrument and remove the battery.

CAUTION

Damage to unused connectors

Moisture, dirt or mechanical impact may damage unused connectors.

Precautions:

- ▶ Attach dust/protection cap on open/unused connectors.

CAUTION

Use of the product with accessories from other manufacturers. For example, field computers, personal computers or other electronic equipment, non-standard cables or external batteries

This may cause disturbances in other equipment.

Precautions:

- ▶ Use only the equipment and accessories recommended by GeoMax.
- ▶ When combined with the product, other accessories must meet the strict requirements stipulated by the guidelines and standards.
- ▶ When using computers, two-way radios or other electronic equipment, pay attention to the information about electromagnetic compatibility provided by the manufacturer.

NOTICE

Rooting your Android device will void your right for any warranty services and support by GeoMax!

2 Description of the System

2.1 General Information


Design

The Zenith06 Pro smart antenna:

- has an integrated helix antenna and Bluetooth capability.
- supports four satellite systems: GPS, GLONASS, BeiDou, Galileo.
- supports access to external differential signals to get typically < 2 cm (2D) positioning results.
- is small, lightweight, durable and has a rubber bumper for drop protection.
- has a low power consumption and a long battery duration.
- is designed to be used on a pole.
- calculates a position from the computed ranges to all visible and activated GNSS satellites.
- can communicate with X-PAD and Zenith Manager software.

2.2 Instrument Components

Description

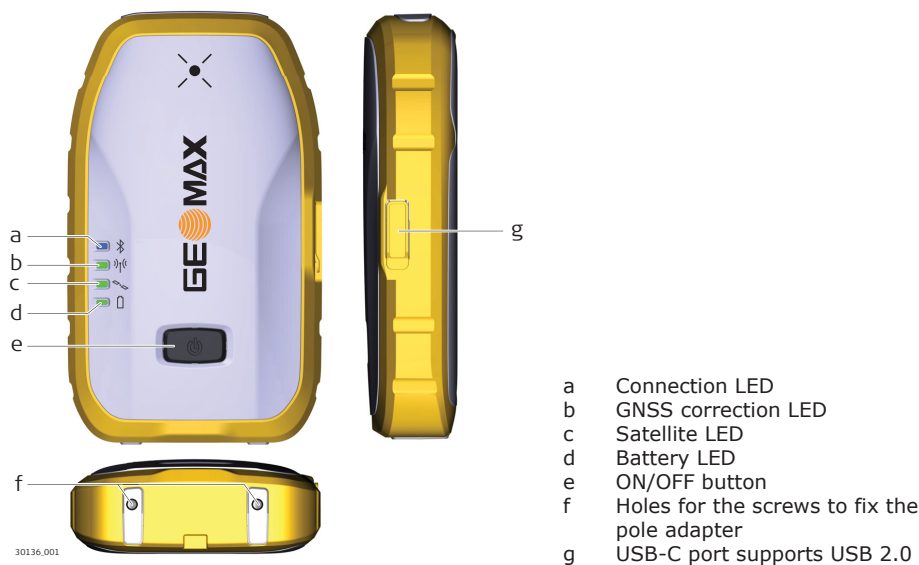


LED indicators

LED indicator	Status	Description
	Connection LED	solid blue Bluetooth is connected.
	GNSS correction LED	solid green The instrument is receiving correction data.
	Satellite LED	solid green The position is available.
	Battery LED	green Normal operation.
		solid red The power is < 10%.
		solid red The battery is being charged.
		solid green The battery is fully charged.

2.3

Accessories

Operation with pole

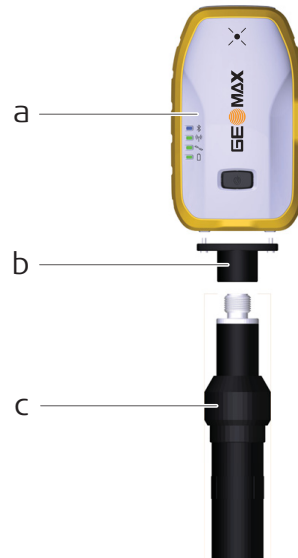

30137.001

- a GeoMax Zenith06 Pro smart antenna
- b Pole mount
- c Carbon pole


3

Operation

3.1

Power On/Off, Charging, Reset

Description

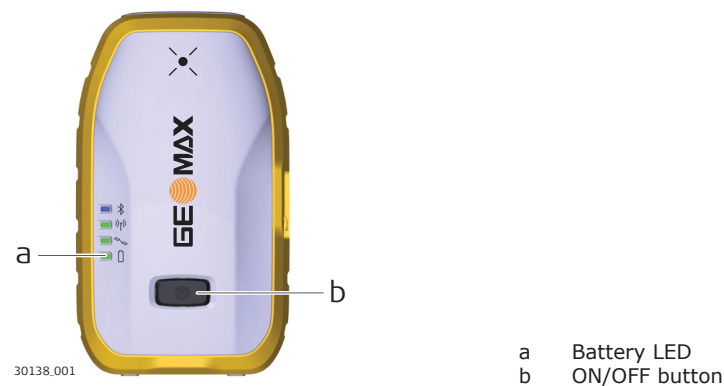


Function	Description	
Power on/off	Turn on: Press and hold the ON/OFF button until the Battery LED is green and the device beeps.	
	 The device starts booting after the first beep. Once it is booted up, the device beeps a second time.	
	Turn off: Press and hold the ON/OFF button until the Battery LED switches off and the device beeps.	
Charging	Use the standard charger and type-C data cable to charge. The Battery LED is solid red while charging and solid green when charging is finished.	
Reset	Ensure the receiver is turned off.	All LEDs are off
	Connect the receiver to power using a USB cable.	The power LED will turn on
	Press and hold the ON/OFF button until all LEDs turned on and off again, then release the button.	All LEDs will start to flash
	While flashing, press and hold the button until all LEDs turn off, then release the button.	The satellite LED will turn on
	 A short press of the button allows to cancel the reset process.	
	Press and hold the button until the LED turns off, then release the button.	All LEDs will be off
	Press and hold the button again until the satellite LED turns on again, then release the button.	The satellite LED will be on
	Press the button briefly once.	All LEDs will flash, indicating the reset process has started
	 Once completed, the LEDs will turn off, the receiver will automatically reboot and start up as normal.	

3.2

Setup for the Zenith06 Pro Smart Antenna

Setup on a pole

To attach the Zenith06 Pro smart antenna on the top of a pole, the pole mount adapter is required - Art. 948915.

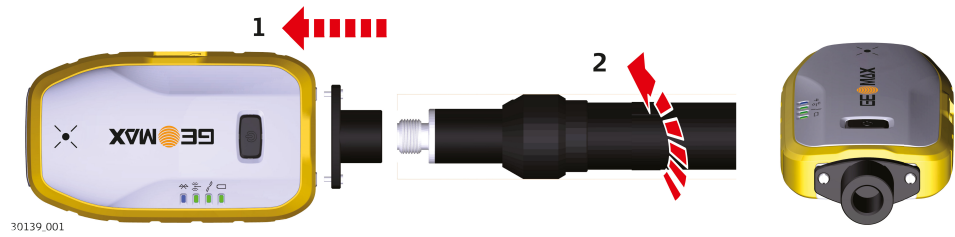

1. Use a slot screwdriver to fix the pole mount adapter with both screws to the Zenith06 Pro smart antenna.
 Make sure to fix the pole mount adapter in the correct orientation.
2. Screw the pole clockwise into the pole mount adapter.

3.3

Phase Centre of the Zenith06 Pro Smart Antenna

Phase centre

The phase centre of the Zenith06 Pro smart antenna location is at the dot near the top of the device.

Pole mode

In pole mode, the offset from the phase centre to the top of the pole, including the pole adapter mount, is automatically accounted for. Make sure to provide the appropriate antenna height in the software.



30140_001

a Phase centre position

3.4

Settings of the Zenith06 Pro Smart Antenna

Step-by-step

1.

Access the Zenith06 Pro smart antenna settings.

In **X-PAD Ultimate**

1. Go to **Settings**.

2. Add a new GNSS device.

3. Select **Zenith06 Pro** from the dropdown list.

In **Zenith Manager**

1. Open the app and establish a connection through cable or Bluetooth.

2.

When configuring the Zenith06 Pro smart antenna, the following settings are available:

• Antenna Height

• Antenna Usage

• Reset Antenna

• Upgrade Antenna

• Info

Refer to X-PAD Ultimate or Zenith Manager documentation for more information.
- Connection to Zenith Manager and Firmware update
- Refer to the Installation Guide Zenith06 for more information.
- 14

Operation

 CAUTION
Unapproved chargers or cables

Connecting the charger improperly may cause serious damage to the device. Any damage caused by misuse is not covered by the warranty. Unapproved chargers or cables can cause the battery to explode or damage the device.

Precautions:

- ▶ Use only GeoMax-approved chargers, batteries, and cables.

4.1**Transport****Transport in a road vehicle**

Never carry the product loose in a road vehicle, as it can be affected by shock and vibration. Always carry the product in its container and secure it.

Shipping

When transporting the product by rail, air or sea, always use the complete original GeoMax packaging, container and cardboard box, or its equivalent, to protect against shock and vibration.

Shipping, transport of batteries

When transporting or shipping batteries, the person responsible for the product must ensure that the applicable national and international rules and regulations are observed. Before transportation or shipping, contact your local passenger or freight transport company.

4.2**Storage****Product**

Respect the temperature limits when storing the equipment, particularly in summer if the equipment is inside a vehicle. Refer to [5 Technical Data](#) for information about temperature limits.

Battery care

- A rechargeable Li-Ion battery powers the instrument. The full performance of a new battery is achieved only after two or three complete charge and discharge cycles
- The battery can be charged and discharged hundreds of times. It eventually wears out
- Do not leave a fully charged battery connected to a charger, as overcharging may shorten its life
- If left unused, a fully charged battery loses its charge over time

Li-Ion batteries

- Refer to [5 Technical Data](#) for information about storage temperature range
- After storage recharge batteries before using
- Protect batteries from damp and wetness. Wet or damp batteries must be dried before storing or use
- A storage temperature range of 0 °C to +30 °C / +32 °F to +86 °F in a dry environment is recommended to minimize self-discharging of the battery
- At the recommended storage temperature range, batteries containing a 40% to 50% charge can be stored for up to one year. After this storage period the batteries must be recharged

4.3


Cleaning and Drying

Product and accessories

- Use only a clean, soft, lint-free cloth for cleaning. If necessary, moisten the cloth with water or pure alcohol. Do not use other liquids; these may attack the polymer components.

Damp products

Dry the product, the container, the foam inserts and the accessories at a temperature not greater than 40 °C/104 °F and clean them. Do not repack until everything is dry. Always close the container when using in the field.



Cables and plugs

Keep plugs clean and dry. Blow away any dirt lodged in the plugs of the connecting cables.

5 Technical Data

5.1 Technical Data

Instrument

Type	Description
Satellites tracked	GPS L1C/A, L2C GLONASS L1OF, L2OF Galileo E1B/C, E5b BeiDou B1I, B2I QZSS L1C/A, L2C SBAS L1
Channels	184
Update rate	Up to 10 Hz
Re-aquisition	< 2 s
RTK initialisation	Typically > 120 s
Cold start time	Typically < 24 s
Hot start	Typically < 15 s
Real-time protocols	RTCM 3.0, RTCM 3.1, RTCM 3.2, RTCM 3.3, RTCM MSM

Frequency band

Type	Frequency band [MHz]
Zenith06 Pro smart antenna	GPS, QZSS, SBAS L1: 1575.42 GPS, QZSS L2: 1227.60 GLONASS L1: 1602.5625-1611.5 GLONASS L2: 1246.4375-1254.3 Galileo E1: 1575.42 Galileo E5b: 1207.14 BeiDou B1: 1561.098 BeiDou B2: 1207.14
Bluetooth	2402...2480

Positioning

Accuracy and reliability are subject to satellite geometry (DOPs), multipath, refractions and obstructions. In static mode they are even subject to occupation times: the longer the Baseline, the longer the occupation time must be.

Type	Description
RTK (RMS)	Horizontal: typical < 2 cm (2D)
Tilt-compensated RTK	Additional Hz uncertainty 2 cm up to 30° tilt

Output power

Type	Output power [mW]
GNSS	Receive only
Bluetooth	5 (Class 1)

Antenna

Type	Antenna	Gain [dBi]	Connector	Frequency band [MHz]
Bluetooth	Internal Microstrip antenna	1.0	-	-

Dimensions



Description	Value
Height	139 mm
Length	80.6 mm
Width	30.6 mm

Weight

Description	Value
Weight	<340 g

Connector

USB	1 USB-C connector, supports USB 2.0
-----	-------------------------------------

Mounting

Pole	GeoMax Zenith06 Pro smart antenna mounted on pole adapter/pole
------	--

System

Processor	Qualcomm SnapDragon
RAM	512 MB DDR3
Storage	8 GB eMMC

Communication

Bluetooth	BT 5.0
-----------	--------

Power

Internal battery	3.8 V, 6120 mAh Type-C charging, supports 1.44 A fast charge
Input voltage	5 V DC/2 A
Power consumption	1.8 W
Working time	> 20 hours
Charge time	Typically 4 hours

Environmental specifications

Type	Operating temperature [°C]	Storage temperature [°C]
Instrument	-40 to +65	-40 to +80

External influences	Protection
Water and dust	IP67 (IEC 60529) and 6 (UL50E)
Humidity	ISO9022-12-04 Resp. +65 °C 92%, 62 h
Drop	1.2 m once to all surfaces onto hard wood (50 mm) over concrete floor within the storage temperature range
Vibration	Vibration (Sinus); ISO 9022-36-05-1 Method 36; Severity 05; State of operating 1 (10-55 Hz, ±0.15 mm, 5 Cycles in XYZ axis)

5.2

Conformity to National Regulations

Labelling GeoMax Zenith06 Pro smart antenna



Antennas

Type	Antenna	Gain [dBi]
Bluetooth	Internal Microstrip antenna	1.0

GNSS frequency bands

Type	Frequency band [MHz]
Zenith06 Pro smart antenna	GPS, QZSS, SBAS: L1 1575.42
	GPS, QZSS: L2 1227.60
	GLONASS: L1 1602.5625-1611.5
	GLONASS: L2 1246.4375-1254.3
	Galileo: E1 1575.42
	Galileo: E5b 1207.14
	BeiDou: B1 1561.098
	BeiDou: B2 1207.14

Frequency bands, output power

Type	Frequency band [MHz]	Output power ¹⁾ [dBm]
Bluetooth	2402–2480	5.90
Bluetooth LE	2402–2480	1.5-9

Radiation Exposure Statement

The radiated output power of the instrument is below the radio frequency exposure limits. Nevertheless, the instrument should be used in such a manner that the potential for human contact during normal operation is minimised.

EU

Hereby, GeoMax AG declares that the radio equipment type Zenith06 Pro smart antenna is in compliance with Directive 2014/53/EU and other applicable European Directives.
The full text of the EU declaration of conformity is available at the following Internet address: <https://geomax-positioning.com/partner-area>.

USA

FCC ID: 2AUW9-ZENITH06PRO
FCC part 15

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, it may cause harmful interference to radio communications.

However, there is no guarantee that interference does not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by GeoMax for compliance could void the user's authority to operate the equipment.

Canada

CAN ICES-003(B)/NMB-003(B)
IC: 9950A-ZENITH06PRO

Canada Compliance Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference
2. This device must accept any interference, including interference that may cause undesired operation of the device

Canada Déclaration de Conformité

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. L'appareil ne doit pas produire de brouillage
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement du dispositif

¹⁾ Conducted power for mobile technologies and EIRP for other technologies.

Radio Frequency (RF) Exposure Compliance Statement

The radiated RF output power of the instrument is below the Health Canada's Safety Code 6 exclusion limit for portable devices (radiated element separation distance between the radiating element and user and/or bystander is below 20 cm).

Singapore

Complies with
IMDA Standards
DA107974

Others

The conformity for countries with other national regulations has to be approved prior to use and operation.

5.3

Dangerous Goods Regulations

Dangerous Goods Regulations

Many products of GeoMax are powered by Lithium batteries.

Lithium batteries can be dangerous under certain conditions and can pose a safety hazard. In certain conditions, Lithium batteries can overheat and ignite.



When carrying or shipping your GeoMax product with Lithium batteries onboard a commercial aircraft, you must do so in accordance with the **IATA Dangerous Goods Regulations**.



There are guidelines on **How to carry** and **How to ship** products with Lithium batteries. Before any transportation of a GeoMax product, we ask you to consult the guidelines on the web page (<http://www.geomax-positioning.com/dgr>) to ensure that you are in accordance with the IATA Dangerous Goods Regulations and that the GeoMax products can be transported correctly.



Damaged or defective batteries are prohibited from being carried or transported onboard any aircraft. Therefore, ensure that the condition of any battery is safe for transportation.

6 GeoMax Zenith06 Pro smart antenna Bundle

6.1 Standard Configuration

Description

The following table shows all parts for the standard configuration.

Description	Quantity
GeoMax Zenith06 Pro smart antenna	1
Pole mount	1
Power adaptor with 4 plugs (US, UK, EU and AU)	1
USB cable Type C – Type C, 1.5 m	1
Arm/Belt pouch	1
Cardboard box	1

6.2 Accessories

Overview

List of accesories available for the GeoMax Zenith06 Pro smart antenna:

- Pole mount to attach the GeoMax Zenith06 Pro smart antenna to the pole
- Carbon fibre pole
- Arm/Belt pouch

The pole mount is a standard accessory for the GeoMax Zenith06 Pro smart antenna. To use the GeoMax Zenith06 Pro smart antenna on a pole, the appropriate adapter is required. This mounting allows customers to use the instrument vertically with precise and stable support.

International Limited Warranty

This product is subject to the terms and conditions set out in the International Limited Warranty which you can download from the GeoMax AG home page at <http://www.geomax-positioning.com> or collect from your GeoMax AG distributor.

Software Licence Agreement

This product contains software that is preinstalled on the product, or that is supplied to you on a data carrier medium, or that can be downloaded by you online according to prior authorisation from GeoMax. Such software is protected by copyright and other laws and its use is defined and regulated by the GeoMax Software Licence Agreement, which covers aspects such as, but not limited to, Scope of the Licence, Warranty, Intellectual Property Rights, Limitation of Liability, Exclusion of other Assurances, Governing Law and Place of Jurisdiction. Please make sure, that at any time you fully comply with the terms and conditions of the GeoMax Software Licence Agreement.

Such agreement is provided together with all products and can also be referred to and downloaded at the GeoMax home page at <http://www.geomax-positioning.com/swlicense> or collected from your GeoMax distributor.

You must not install or use the software unless you have read and accepted the terms and conditions of the GeoMax Software Licence Agreement. Installation or use of the software or any part thereof, is deemed to be an acceptance of all the terms and conditions of such Licence Agreement. If you do not agree to all or some of the terms of such Licence Agreement, you must not download, install or use the software and you must return the unused software together with its accompanying documentation and the purchase receipt to the distributor from whom you purchased the product within ten (10) days of purchase to obtain a full refund of the purchase price.

Open Source information

The software on the product may contain copyright-protected software that is licenced under various open source licences.

Copies of the corresponding licences

- are provided together with the product (for example in the About panel of the software)
- can be downloaded on <https://geomax-positioning.com/>

If foreseen in the corresponding open source licence, you may obtain the corresponding source code and other related data on <https://geomax-positioning.com/>.

Contact

support@geomax-positioning.com in case you need additional information.

1019119-1.1.0en

Original text (1019119-1.1.0en)

© 2025 GeoMax AG is part of Hexagon AB.
All rights reserved.

GeoMax AG

Espenstrasse 135

9443 Widnau

Switzerland

www.geomax-positioning.com

